



SANDY SPRINGS™
GEORGIA

ADDENDUM NUMBER 3

INVITATION TO BID
21-014
ROBERTS DRIVE SIDEWALK PROJECT TS171

RESPONSE DUE DATE
OCTOBER 8, 2020, 2:00 P.M. EST

COMPLETE THIS ADDENDUM, SIGN and SUBMIT with the ITB.

To All Prospective Offerors:


The deadline for questions has passed. In reference to the ITB listed above, the following answers to questions, additions, deletions and changes are hereby incorporated into the ITB:

Question:



Q: There is a full blown specs on waterman installation including qualifications. Yet the only water item on the project is the adjustment of two water meter boxes to grade. Am I missing something?

A: The water meters will be relocated by COA Water. The sidewalk contractor will be required to coordinate with COA Water for the relocation. The relocated water meters will be adjusted as needed by the sidewalk contractor. The specs are required by COA Water to be included in all work involving COA Water facilities.

This sheet replaces the sheet 38-0003 in the set

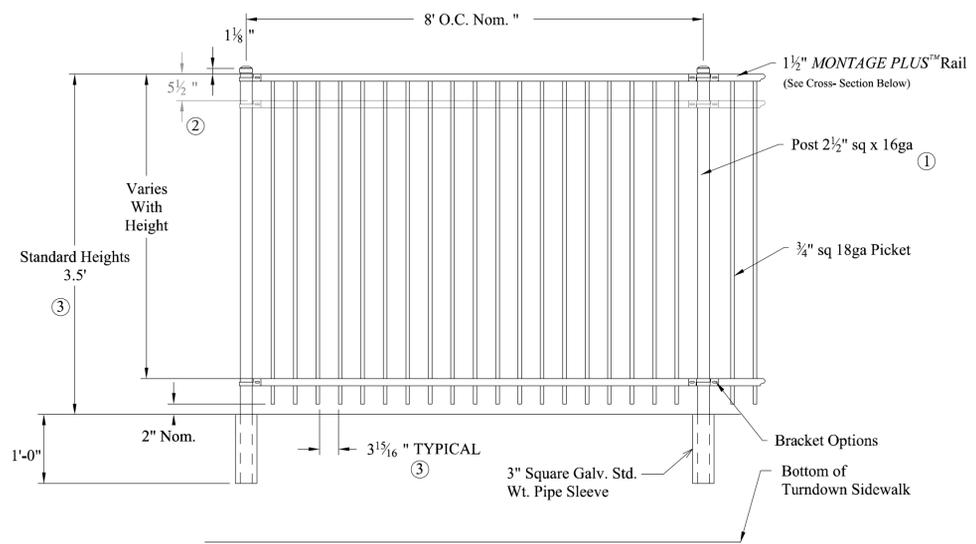

- NOTES:**
1. Post size depends on handrail height and wind loads. See MONTAGE PLUS specifications for post sizing chart.
 2. Third rail required.
 3. Available in 3" air space and/or Flush Bottom on most heights.
 4. Cast 3" square galvanized sleeve in the parapet. Allow non-shrink grout to cure for three days before fence is installed.
 5. Apply galvanizing repair compound, in accordance with Georgia DOT Specification Section 645, to ends of 3" square galvanized sleeves.
 6. For further details, see Georgia DOT Specification Sections 643 and 894.

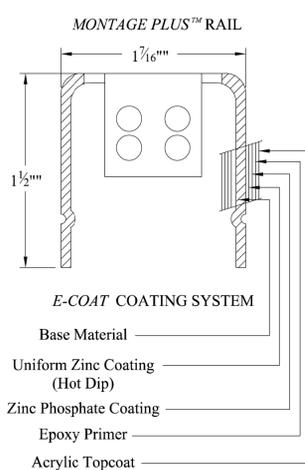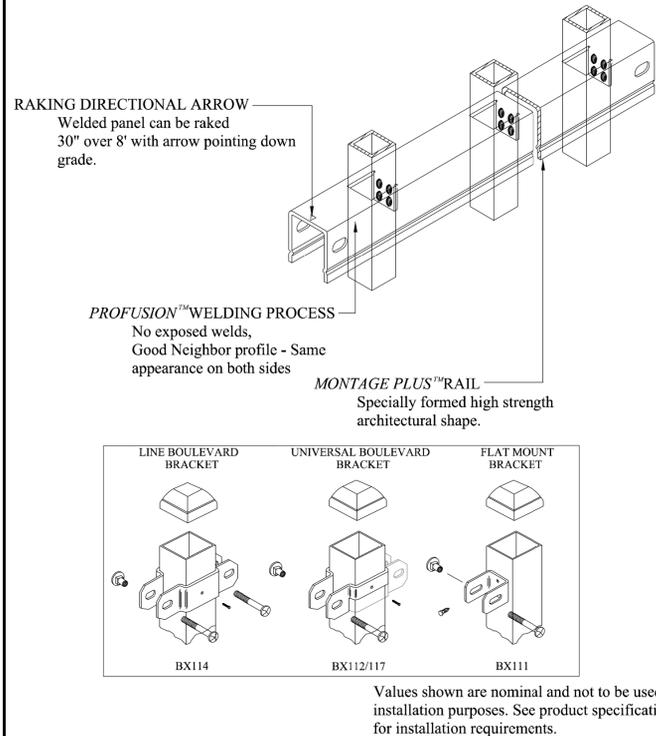

- NOTES:**
1. THE PEDESTRIAN RAILING AND THE MEANS OF ATTACHMENT TO THE TURNDOWN SIDEWALK SHOULD BE DESIGNED PER SECTION 13.8 OF THE AASHTO LRFD SPECIFICATIONS, 7TH EDITION, 2014. CONTRACTOR TO PROVIDE SHOP DRAWING FOR POST ANCHORING. SEE PLAN SHEET 13-0001 FOR LOCATION.
 2. STYLE AND PANEL OPTION AT THE DISCRETION OF THE CITY OF SANDY SPRINGS.
 3. AN EQUIVALENT PRODUCT MAY BE SUBMITTED FOR APPROVAL BY THE ENGINEER.
 4. PANEL HEIGHT AND POST SPACING TO MATCH EXISTING WROUGHT IRON FENCE AS SHOWN ON PARCEL 1 DAVIS ACADEMY (4' HEIGHT X 8' LONG).


MONTAGE PLUS®

STYLES, HEIGHTS, & PANEL OPTIONS



CLASSIC™

Available Heights: 3', 3½', 4', 5' or 6'
 Rail Treatment: Extended Picket or Flush Bottom
 Picket Air-Space: 4" standard or 3" Pet, Pool & Play

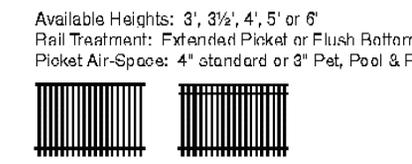


MAJESTIC™



GENESIS™

Available Heights: 3', 3½', 4', 5' or 6'
 Rail Treatment: Extended Picket or Flush Bottom
 Picket Air-Space: 4" standard or 3" Pet, Pool & Play

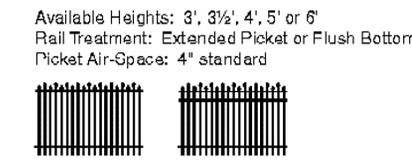

WARRIOR™



N|V|5
 NV5 ENGINEERS & CONSULTANTS, INC.
 1255 CANTON STREET, SUITE G
 ROSWELL, GA 30075
 P: 678.795.3600 www.NV5.com
GA License # PE0003735, LSF000935
 formerly CALX Engineers & Consultants

N. T. S.

REVISION DATES	
09/22/2020	

SPECIAL CONSTRUCTION DETAIL			
ROBERTS DRIVE SIDEWALK			
FENCING DETAILS			
CHECKED:	DATE:	DRAWING No.	
BACKCHECKED:	DATE:	38-0003	
CORRECTED:	DATE:		
VERIFIED:	DATE:		

I hereby acknowledge receipt of Addendum Number 3 for #21-014 ROBERTS DRIVE SIDEWALK PROJECT TS171 and have incorporated the changes into my response for the above mentioned Invitation To Bid.

COMPANY NAME: _____

CONTACT PERSON: _____

ADDRESS:

CITY: _____ STATE: _____ ZIP: _____

PHONE: _____ FAX: _____ EMAIL ADDRESS: _____

SIGNATURE: _____ DATE: _____