



WEST ELEVATION
44' 8"

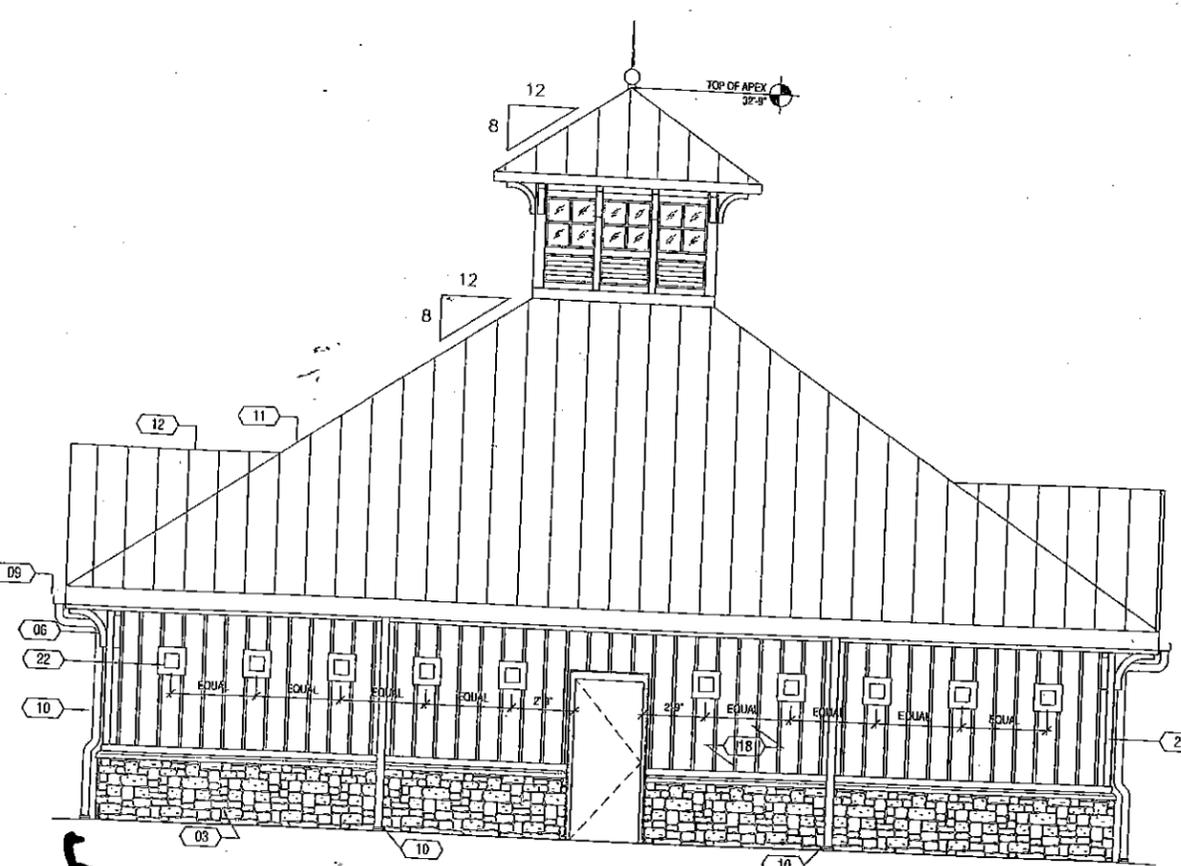


NORTH ELEVATION
44' 8"

44' 8" X 44' 8"
outside Bldg
Measurements

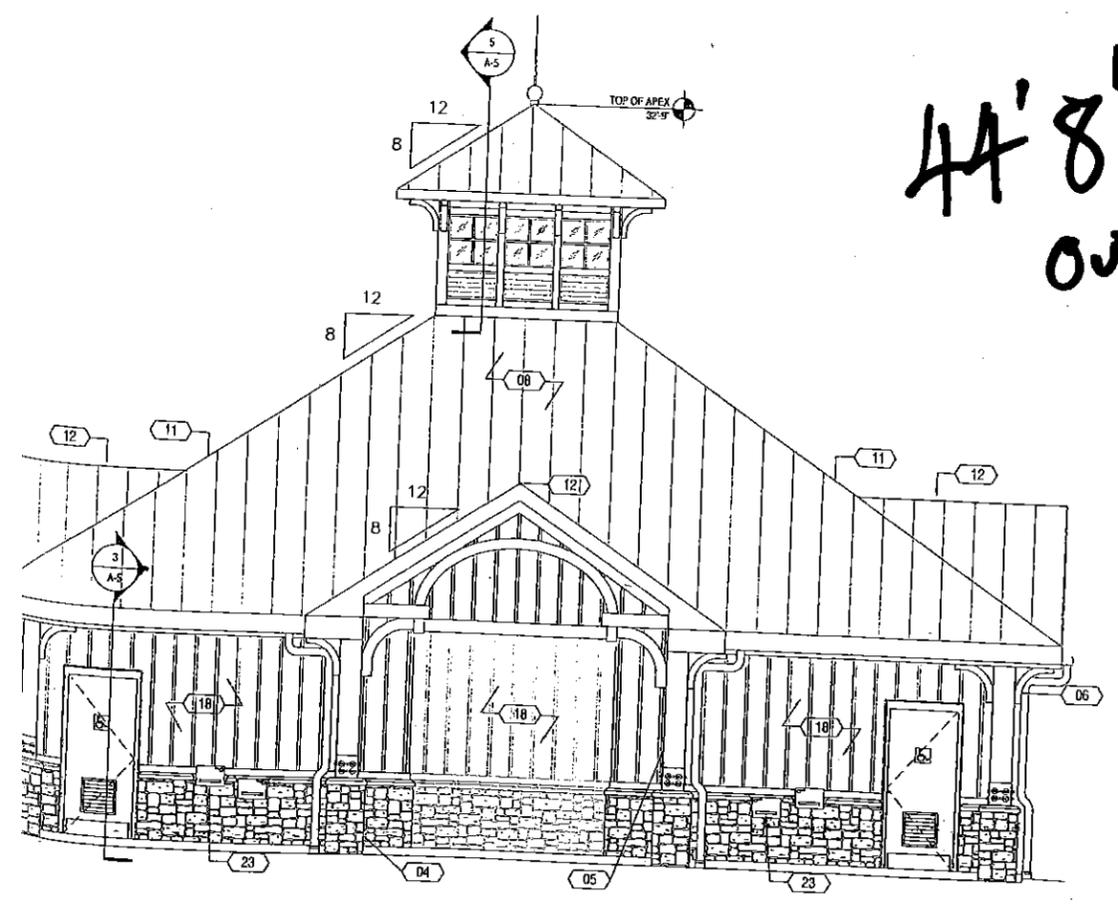

2 SOUTH ELEVATION
SCALE 1/4" = 1'-0"

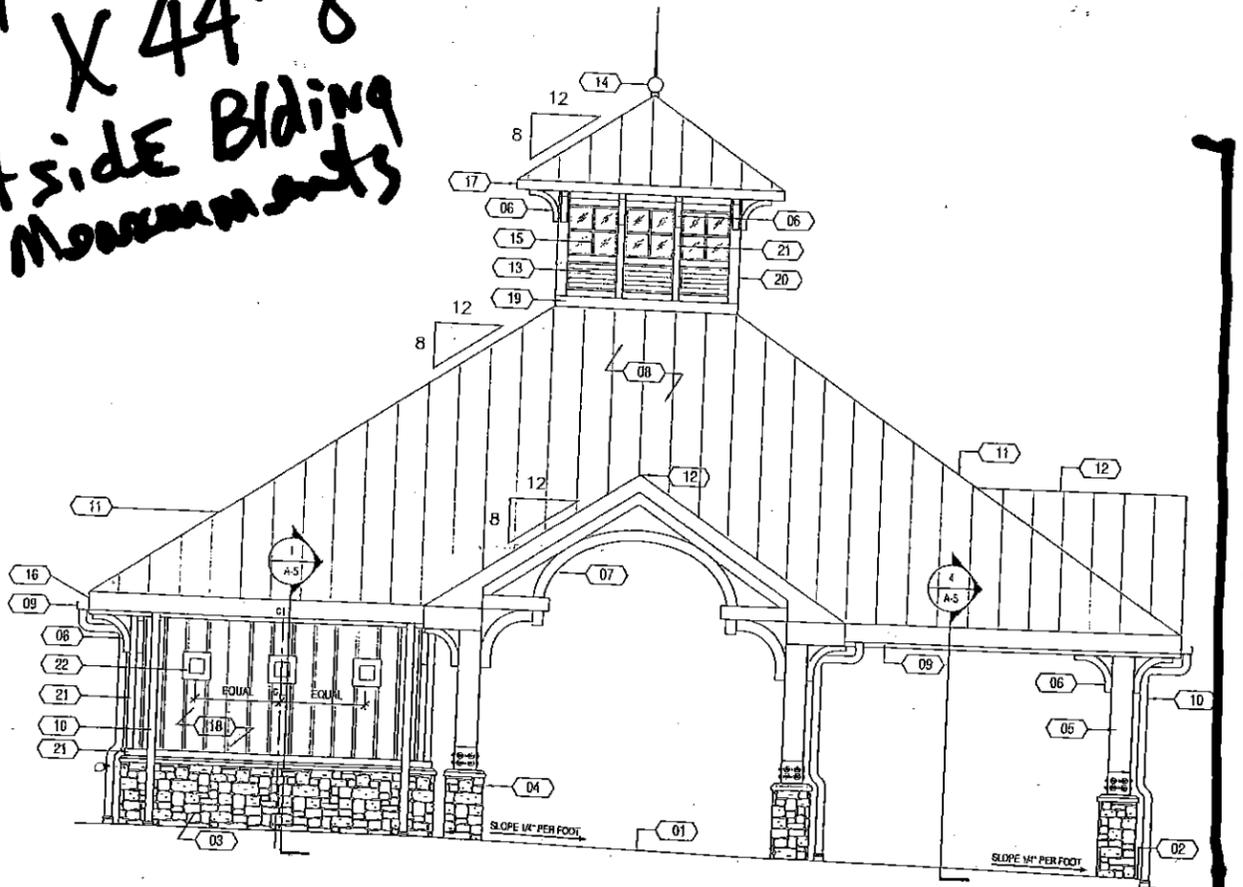


1 EAST ELEVATION
SCALE 1/4" = 1'-0"

32 ft.

← Front view

- ELEVATION KEY NOTES
- 01 STONE PAVERS ON PATIO SEE 10A-1 FOR DET.
 - 02 EDGE OF STONE PAVERS SEE A-3 FOR FINISH
 - 03 EXTERIOR BASE WALL ASSEMBLY: PRE-CAST STONE SILL, 4" STONE VENEER W/ ADJ. WALL TIES, AIR SPACE AND 8" CMU W/ DAMP-PROOFING, SEE STRUCT. FOR FURTHER INFO.
 - 04 DECORATIVE COLUMN BASE W/ STONE VENEER ATTACHED TO CONCRETE STRUCTURE BASE SEE STRUCT FOR FURTHER INFO
 - 05 12x12 STRUCT WOOD COLUMN SEE STRUCT. FOR FURTHER INFO
 - 06 4x4 RS CEDAR WITH 8" RADIUS DECORATIVE BRACKET
 - 07 HAMMER TRUSS BEAM PRE-ENGINEERED DESIGNED BY MANUFACTURER - VERMONT TIMBER WORK OR APPROVED EQUAL
 - 08 PROVIDE & INSTALL ROOFING TO RECEIVE 25 YR. (LABOR & MAT'L) WARRANTY BY ROOF MFR. INSTALL A STANDING SEAM METAL ROOFING SYSTEM. 18" WIDE ROOF PANELS FASTEN TO ROOF TRUSS SYSTEM ONLY OVER #30 ASPHALT FELT
 - 09 PREF-FIN MTL. GUTTER - ALIGN GUTTER STRAPS W/ STANDING SEAMS @ 32" O.C.
 - 10 DOWN SPOT INTO GROUND BOOT AND TIED TO STORM & SEWER DRAINAGE - SEE CIVIL FOR FURTHER INFO
 - 11 HIP RIDGE
 - 12 GABLE RIDGE
 - 13 COPULA VENT BY WALPOLE LOUVER OR APPROVED EQUAL
 - 14 WEATHER VAIN COPPER FINIAL: MFR. BY - WATHERVANES OF MAINE MDL. # 714V1 OR APPROVED EQUAL
 - 15 COPULA WINDOW 2'-2"x2'-2" 1/4" SINGLE PANE GLASS
 - 16 2x12 RS CEDAR FACIA BOARD
 - 17 2x8 RS CEDAR FACIA BOARD
 - 18 TYP. EXTERIOR WALL ASSEMBLY: 1x12 RS CEDAR BOARD & 1x2 RS CEDAR BATTEN, 2x4 FURRING @ 24" O.C. HORIZ. W/ 2x4'S @ TOP & BOT., 1 1/2" BATT INSULATION & 8" CMU W/ DAMP-PROOFING, FILL CORE WITH FOAM-IN PLACING INSUL. WHERE STRUCT. FILL NOT REQUIRED, SEE STRUCT. FOR FURTHER INFO.
 - 19 1x8 RS CEDAR TRIM BOARD STAINED
 - 20 1x6 RS CEDAR TRIM BOARD STAINED
 - 21 1x4 RS CEDAR TRIM BOARD STAINED
 - 22 8x8x4 GLASS BLOCK WITH 1x4 RS CEDAR TRIM AROUND
 - 23 HI-LOW ADA COMPLIANT CHILLED DRINKING FOUNTAIN SEE PLUMBING FIXTURE SCHEDULE



2771 Lawrenceville Hwy., Suite 206
Decatur, GA 30033
P 770-939-9446
scotth@scotthalearchitect.com

THIS DRAWING AND ALL INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF SCOTT D. HALE ARCHITECTS. NO PART OF THIS DRAWING, REPRESENTATION OR INFORMATION MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF SCOTT D. HALE ARCHITECTS.

DATE:	NO.	ISSUES & REVISIONS
11-29-12		ISSUED FOR CONSTRUCTION

PROJECT:
ABERNATHY GREENWAY RESTROOMS
SANDY SPRINGS PARKS AND RECREATION DEPARTMENT
SANDY SPRINGS, GEORGIA

CONTENTS:
EXTERIOR ELEVATIONS & BUILDING SECTIONS

DATE: 11-29-12
PROJ. NO. SDH11-105
SHEET NO:

SURVEY NOTE:


LOCATION AND ARRANGEMENT OF UNDERGROUND UTILITIES ARE PROVIDED BY ACCESSIBLE FIELD EVIDENCE. THERE IS NO CERTAINTY OF THE ACCURACY OF THIS INFORMATION AND IT SHALL BE CONSIDERED IN THAT LIGHT BY THOSE USING THIS SURVEY. UTILITIES AND STRUCTURES NOT SHOWN MAY BE ENCOUNTERED. THE OWNER, HIS CONSULTANTS, AND HIS CONTRACTORS SHALL HEREBY DISTINCTLY UNDERSTAND THAT THIS SURVEYOR IS NOT RESPONSIBLE FOR THE SUFFICIENCY OF THE UNDERGROUND UTILITY INFORMATION PROVIDED HEREON.

100A - PROPOSED SANITARY MANHOLE TYPE 1
 TOP ELEVATION 1004.75
 PROPOSED INVERT OUT 999.85
 STATION: 205+54.00
 OFFSET: 154.68 LT

RESTROOM FACILITY

MATCHLINE - STA. 205+30.00

MATCHLINE - STA. 211+95.00

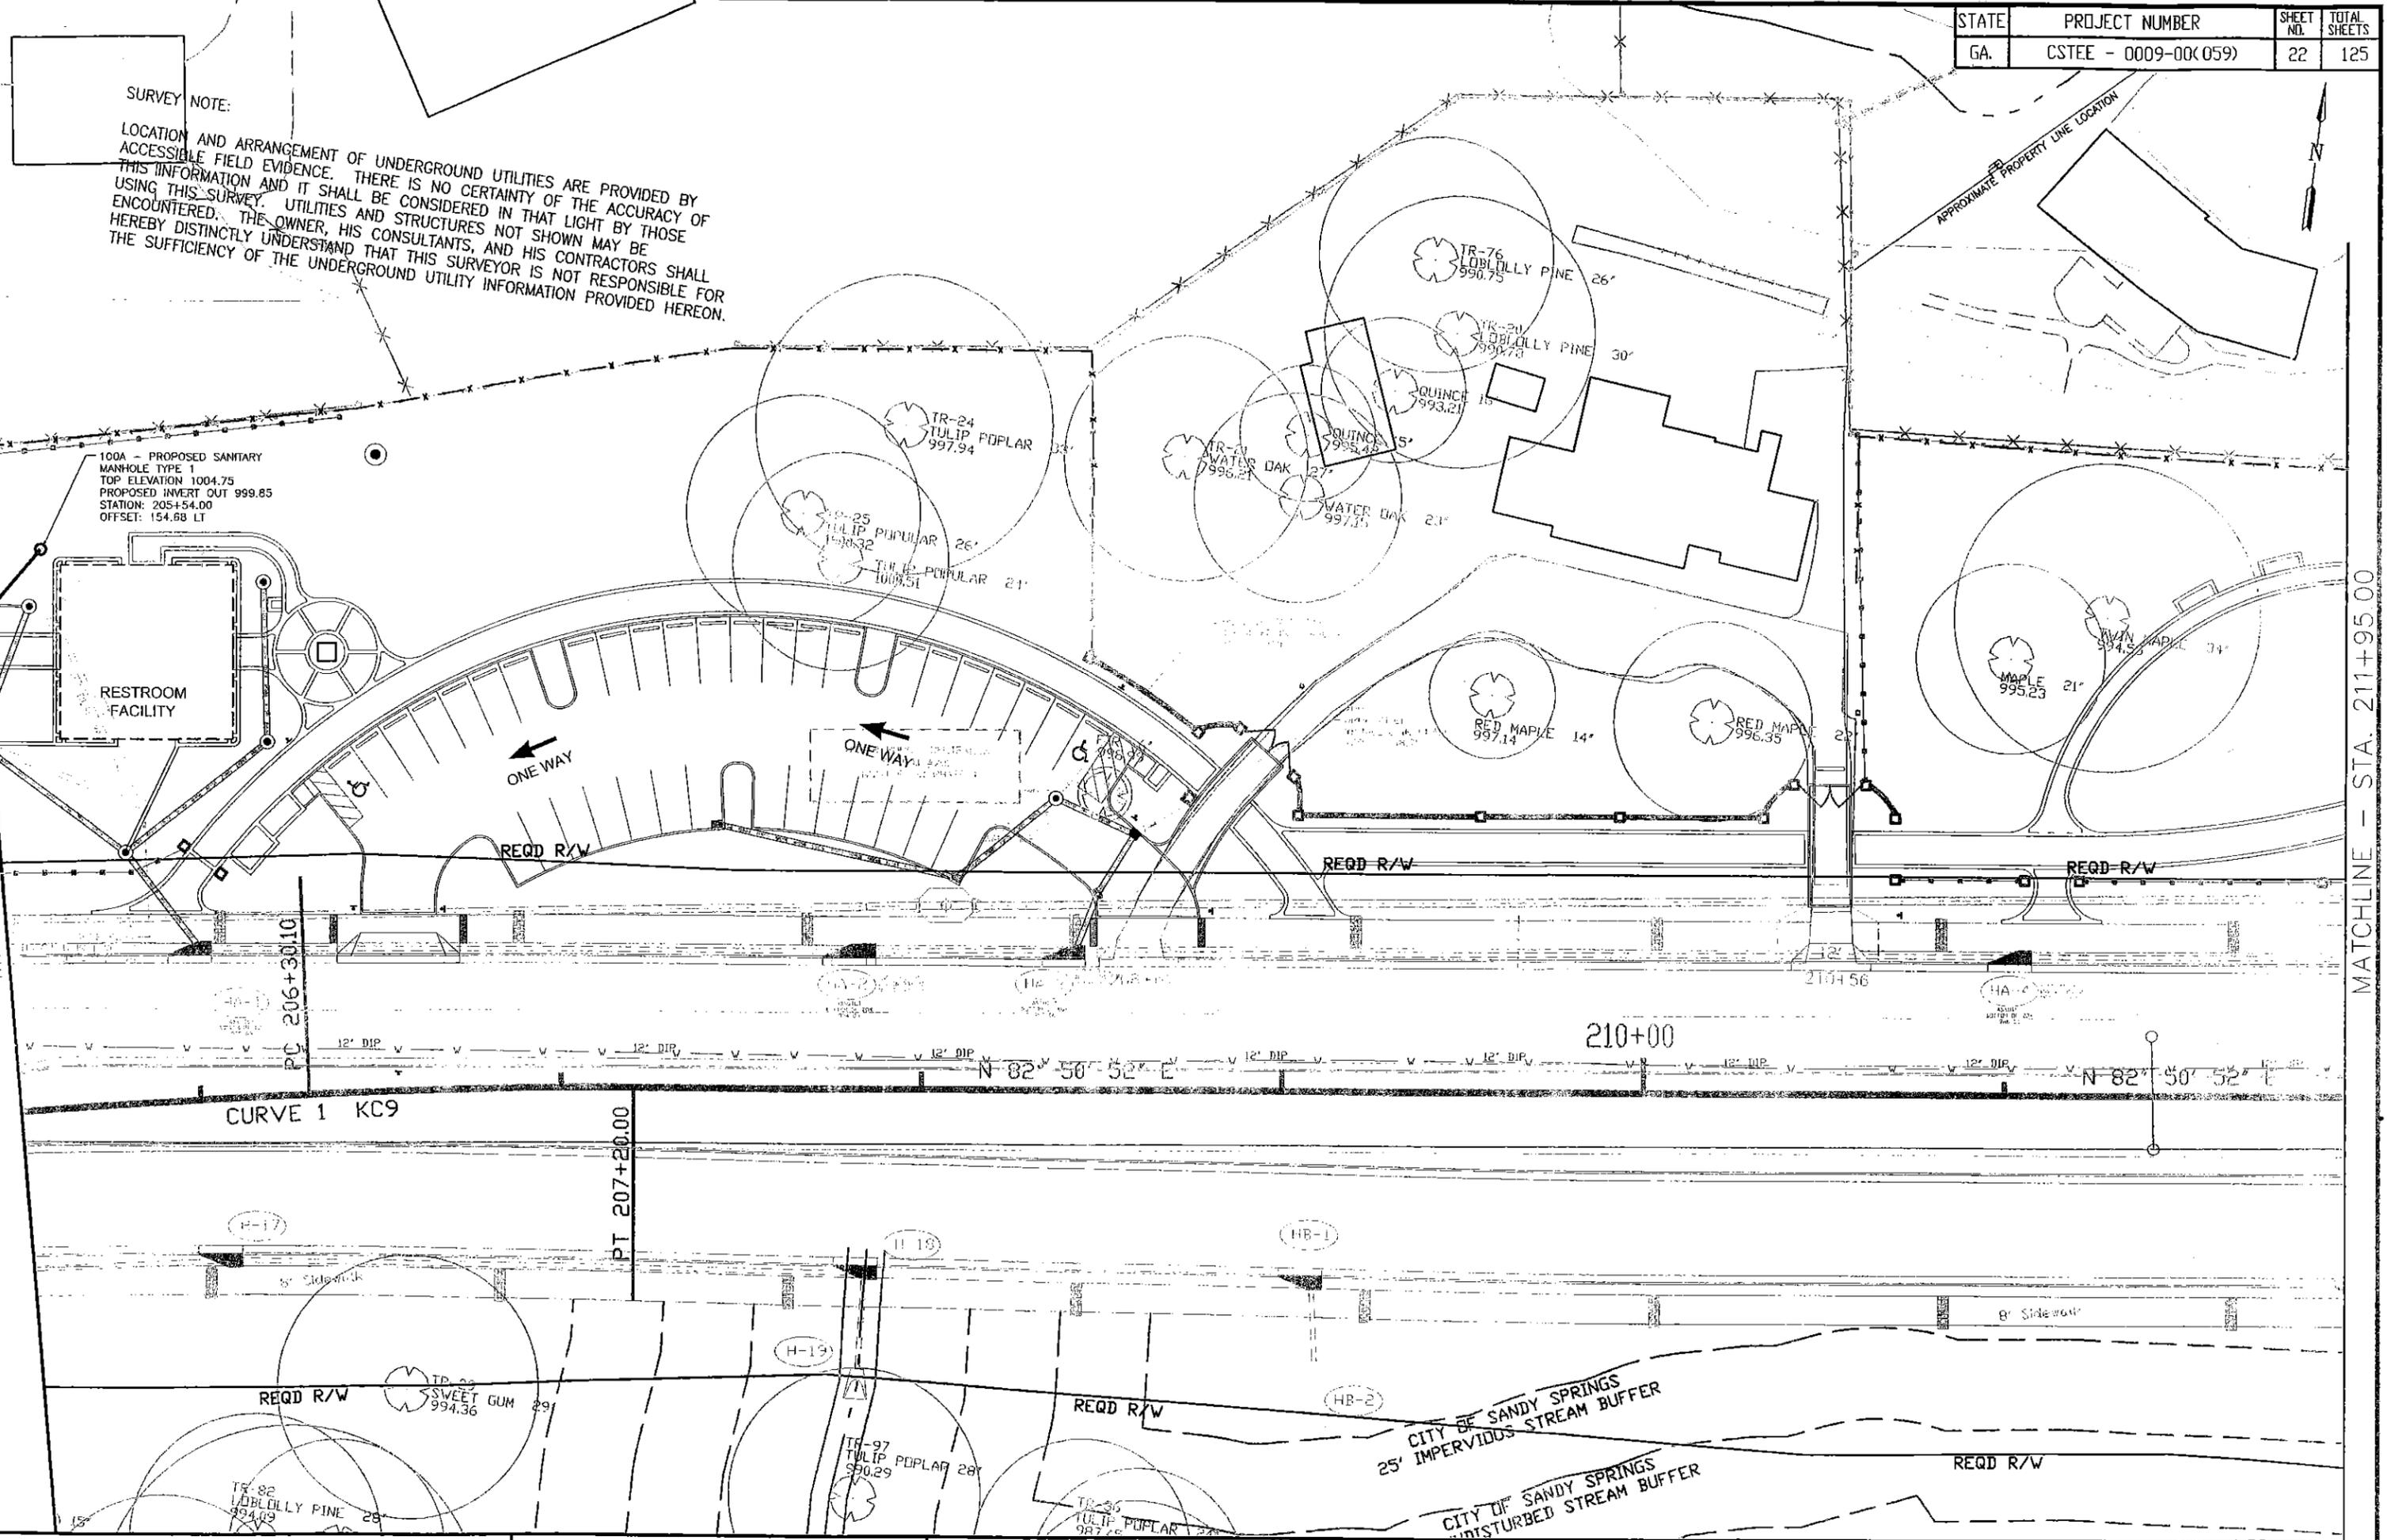


CURVE 1 KC9

PT 207+20.00

210+00

CITY OF SANDY SPRINGS
 25' IMPERVIOUS STREAM BUFFER



CITY OF SANDY SPRINGS
 DISTURBED STREAM BUFFER

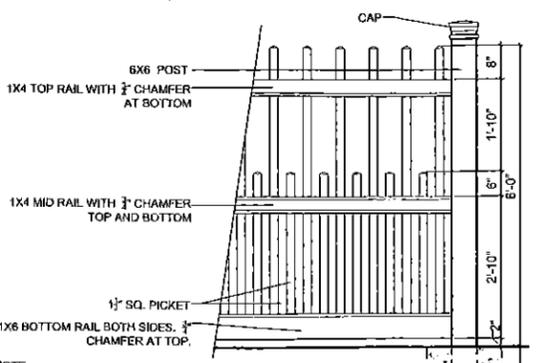


NOTE:

ALL FENCE MATERIAL TO BE PAINTED WITH VINYL SAFE PAINT BY SHERWIN WILLIAMS, BENJAMIN MOORE, (OR APPROVED EQUAL) COLOR TO BE SELECTED BY OWNERS REPRESENTATIVE PRIOR TO FABRICATION. PAINT TO BE APPLIED BY THE MANUFACTURER.



ALL FENCE MATERIAL TO BE SOLID CELLULAR VINYL.

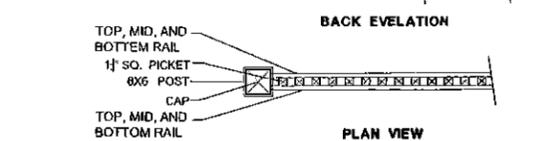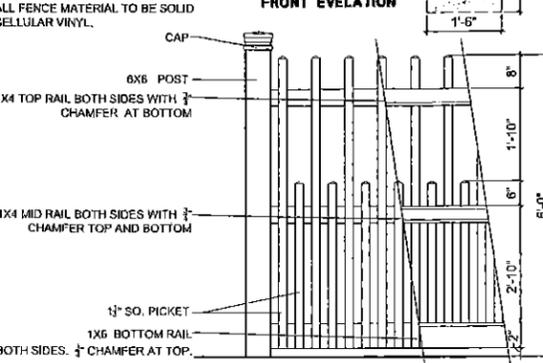


6' TALL PICKET FENCE

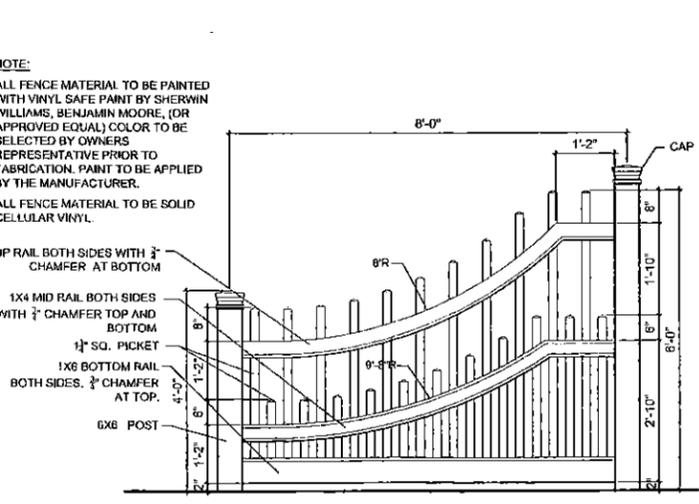


2 TAPERED FENCE DETAIL

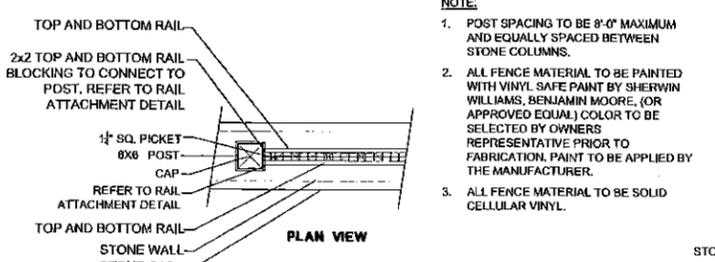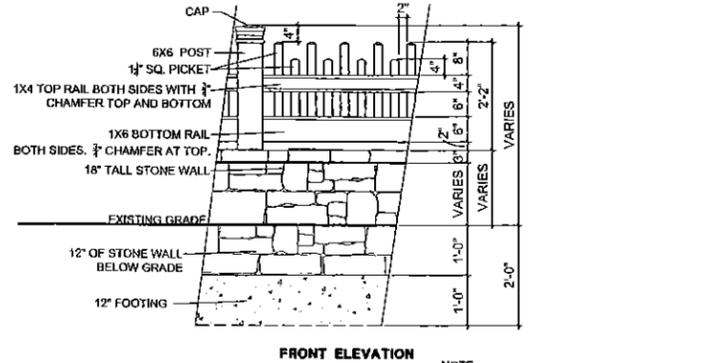


3 STONE WALL AND FENCE DETAIL

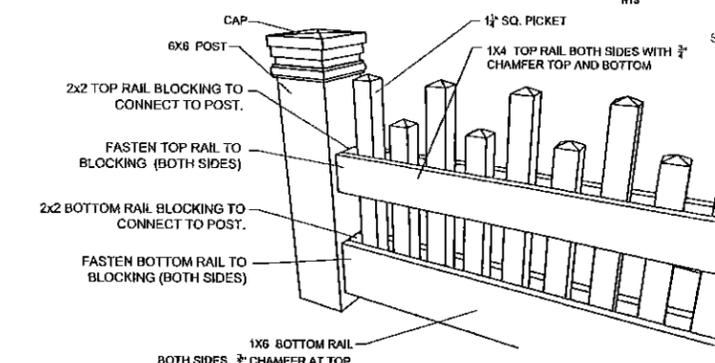




4 RAIL ATTACHMENT DETAIL

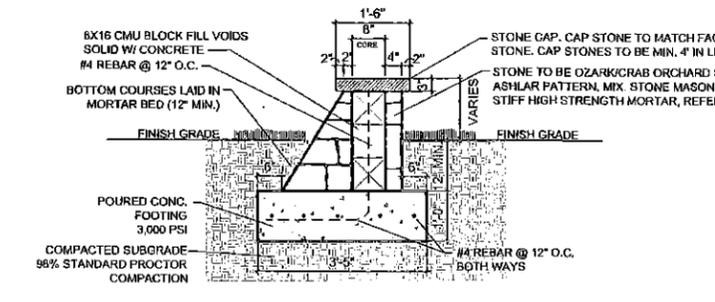

5 STONE WALL DETAIL

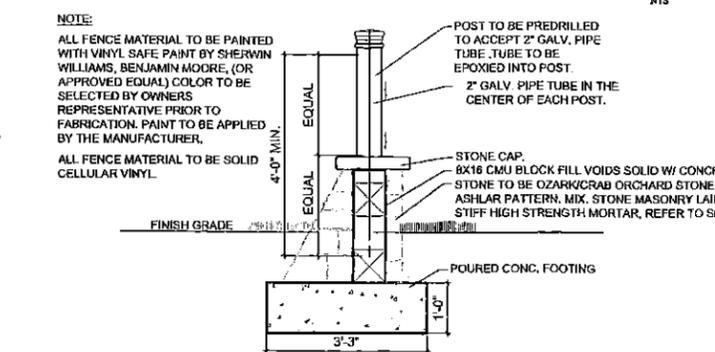

6 FENCE POST ATTACHMENT TO STONE WALL

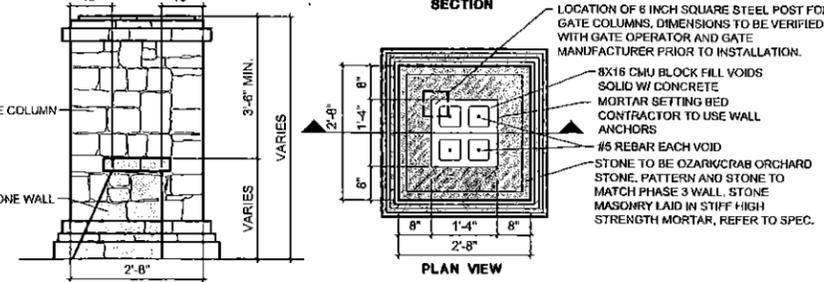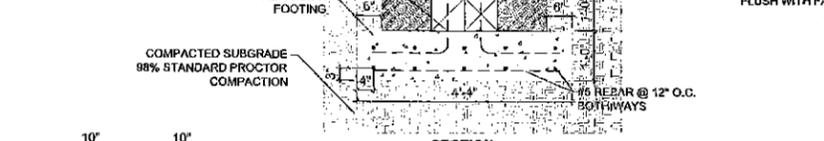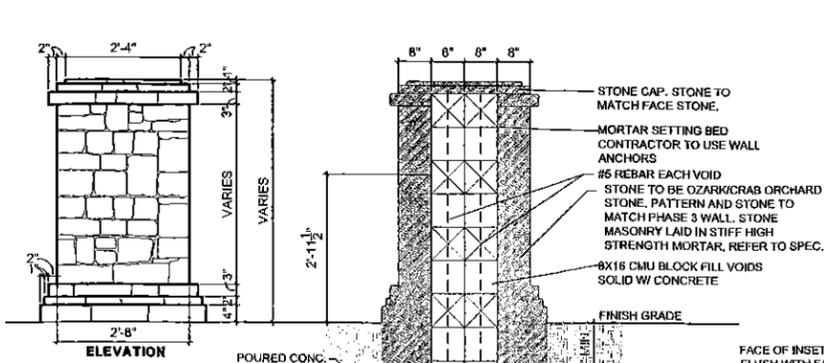

7 STONE COLUMN DETAIL



NOTES:

OR APPROVED EQUAL

1. ALL GATE MATERIAL (SOLID CELLULAR VINYL) TO BE PAINTED WITH VINYL SAFE PAINT BY SHERWIN WILLIAMS (OR APPROVED EQUAL). PAINT TO BE APPLIED BY THE MANUFACTURER. COLOR TO BE SELECTED BY OWNER PRIOR TO FABRICATION.

2. ALL FENCE MATERIAL TO BE SOLID CELLULAR VINYL. ALL RAILS TO BE FABRICATED WITH REINFORCED STEEL CORE.

4. FOR LOCAL GATE OPERATOR SUPPLIER AND INFORMATION CONTACT: LYNN AUSTIN - 770458-2762 WITH ADVANCED ALARM 3619 SHALLOWFORD ROAD, DORAVILLE, GEORGIA 30340

5. QUALIFIED GATE OPERATOR INSTALLERS: GATE MAN / ATA - STEVE DEMPSEY - 404-4345240 ADVANCED GATES - DAVE SWEET - 678-665-0445 GATE GUY - CHUCK PEA - 678-491-6680

6. BEFORE GATE OPERATOR INSTALLATION, THE CONTRACTOR SHALL FOLLOW THE FOLLOWING RECOMMENDED ORDER OF INSTALLATION - FIRST INSTALL THE STEEL GATE POSTS, SECOND THE HINGES, THIRD THE GATES, FOURTH THE GATE OPERATOR, THEN LAST FINISH STONE WORK ON COLUMNS AROUND STEEL GATE POSTS PER PLANS AND DETAILS.

OR APPROVED EQUAL

WTS

ELECTRIC GATE OPENER MANUFACTURER: FAAC INTERNATIONAL, INC. 303 LEDGINGTON AVENUE CHEYENNE, WY 82007 TELEPHONE: 1-800-221-8276 WEBSITE: WWW.FAACUSA.COM

FOR ENTRY & EXIT MODEL: (2) - 400 CRAC B-PARTING KIT 115 VOLT (HYDRAULIC OPERATOR FOR SWING-LEAF GATES) KIT INCLUDES 1-455-D CONTROL PANEL, PRE-WIRED 14X10 ENCLOSURE, 2-400 CRAC 115 VOLT ARM.

(1) - 84-400 POSITIVE STOP #490109

(2) - BATTERY BACKUP 115 VOLT # 3520

(2) - MAG LOCK RELAY 12 VOLT A/C #2352

(2) - SECURITY MOUNT MAG LOCK 24 VOLT D/C

(1) - PAVE OVER PRE-FORMED LOOP (4X8) 50' LEAD #NL1218-50

(1) - PAVE OVER PRE-FORMED LOOP (4X8) 100' LEAD #NL1218-100

(1) - DSP 10 PLUG IN LOOP DETECTOR #2687

(1) - MULTICODE WIRELESS RECEIVER


(2) - MULTICODE WIRELESS TRANSMITTER

(1) - MULTICODE WIRELESS KEY PAD




(2) - WEATHERPROOF ENCLOSURE/KEY PADS FOR GATE EXIT ON GOOSENECK STANDS

OR MANUFACTURER: DOORING, INC 120 S. GLASGOW AVENUE INGLEWOOD, CA 90301 TELEPHONE: (800) 826 7493 WEBSITE: HTTP://WWW.DOORING.COM PROVIDE SIMILAR GATE OPENER AND ACCESSORIES AS SPECIFIED ABOVE.



OR APPROVED EQUAL

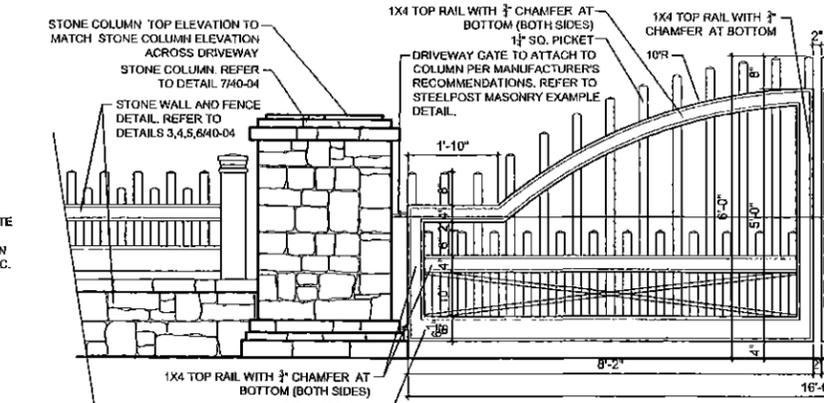

9 DRIVEWAY GATE DETAIL

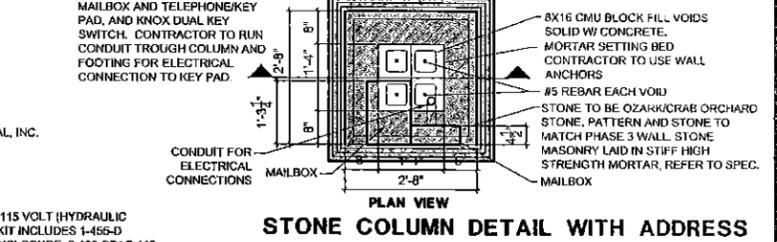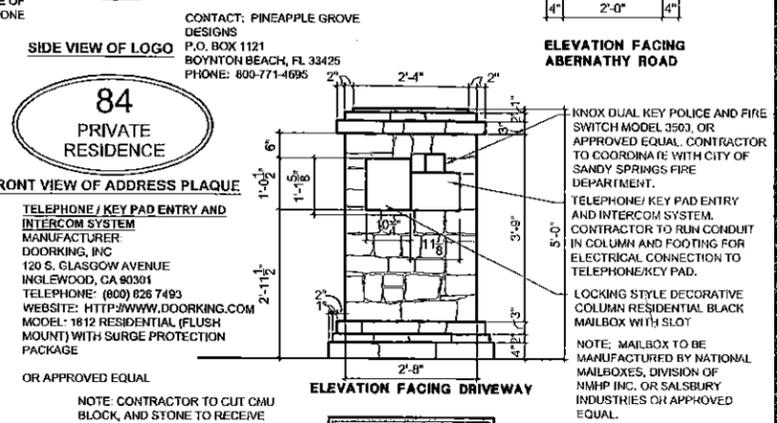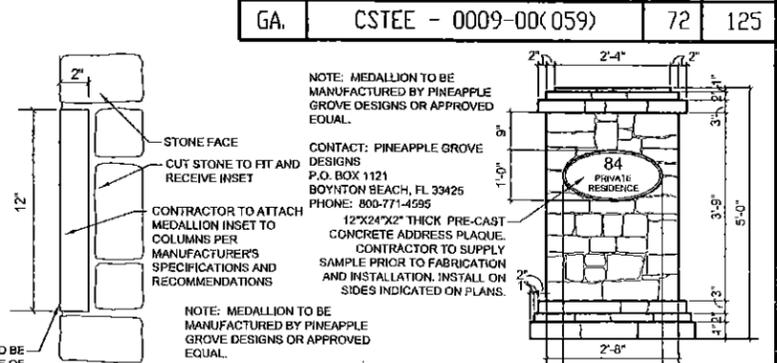


8 STONE COLUMN DETAIL WITH ADDRESS PLAQUE, MAILBOX, AND KEY PAD

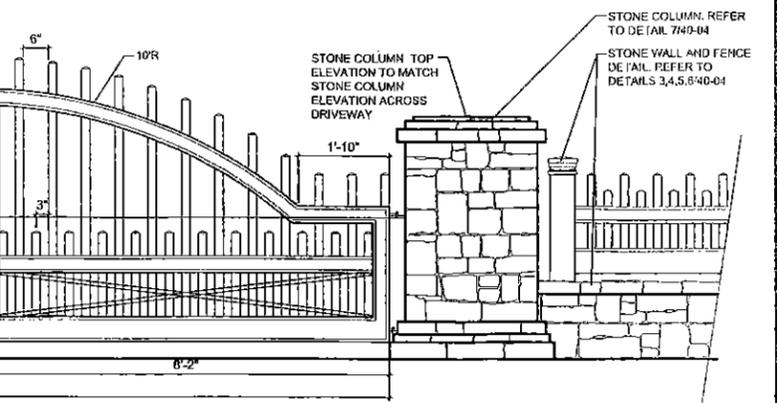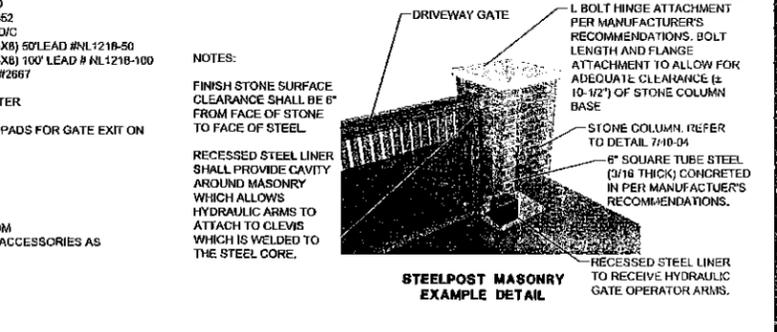

9 DRIVEWAY GATE DETAIL

STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	CSTEE - 0009-00(059)	76	125

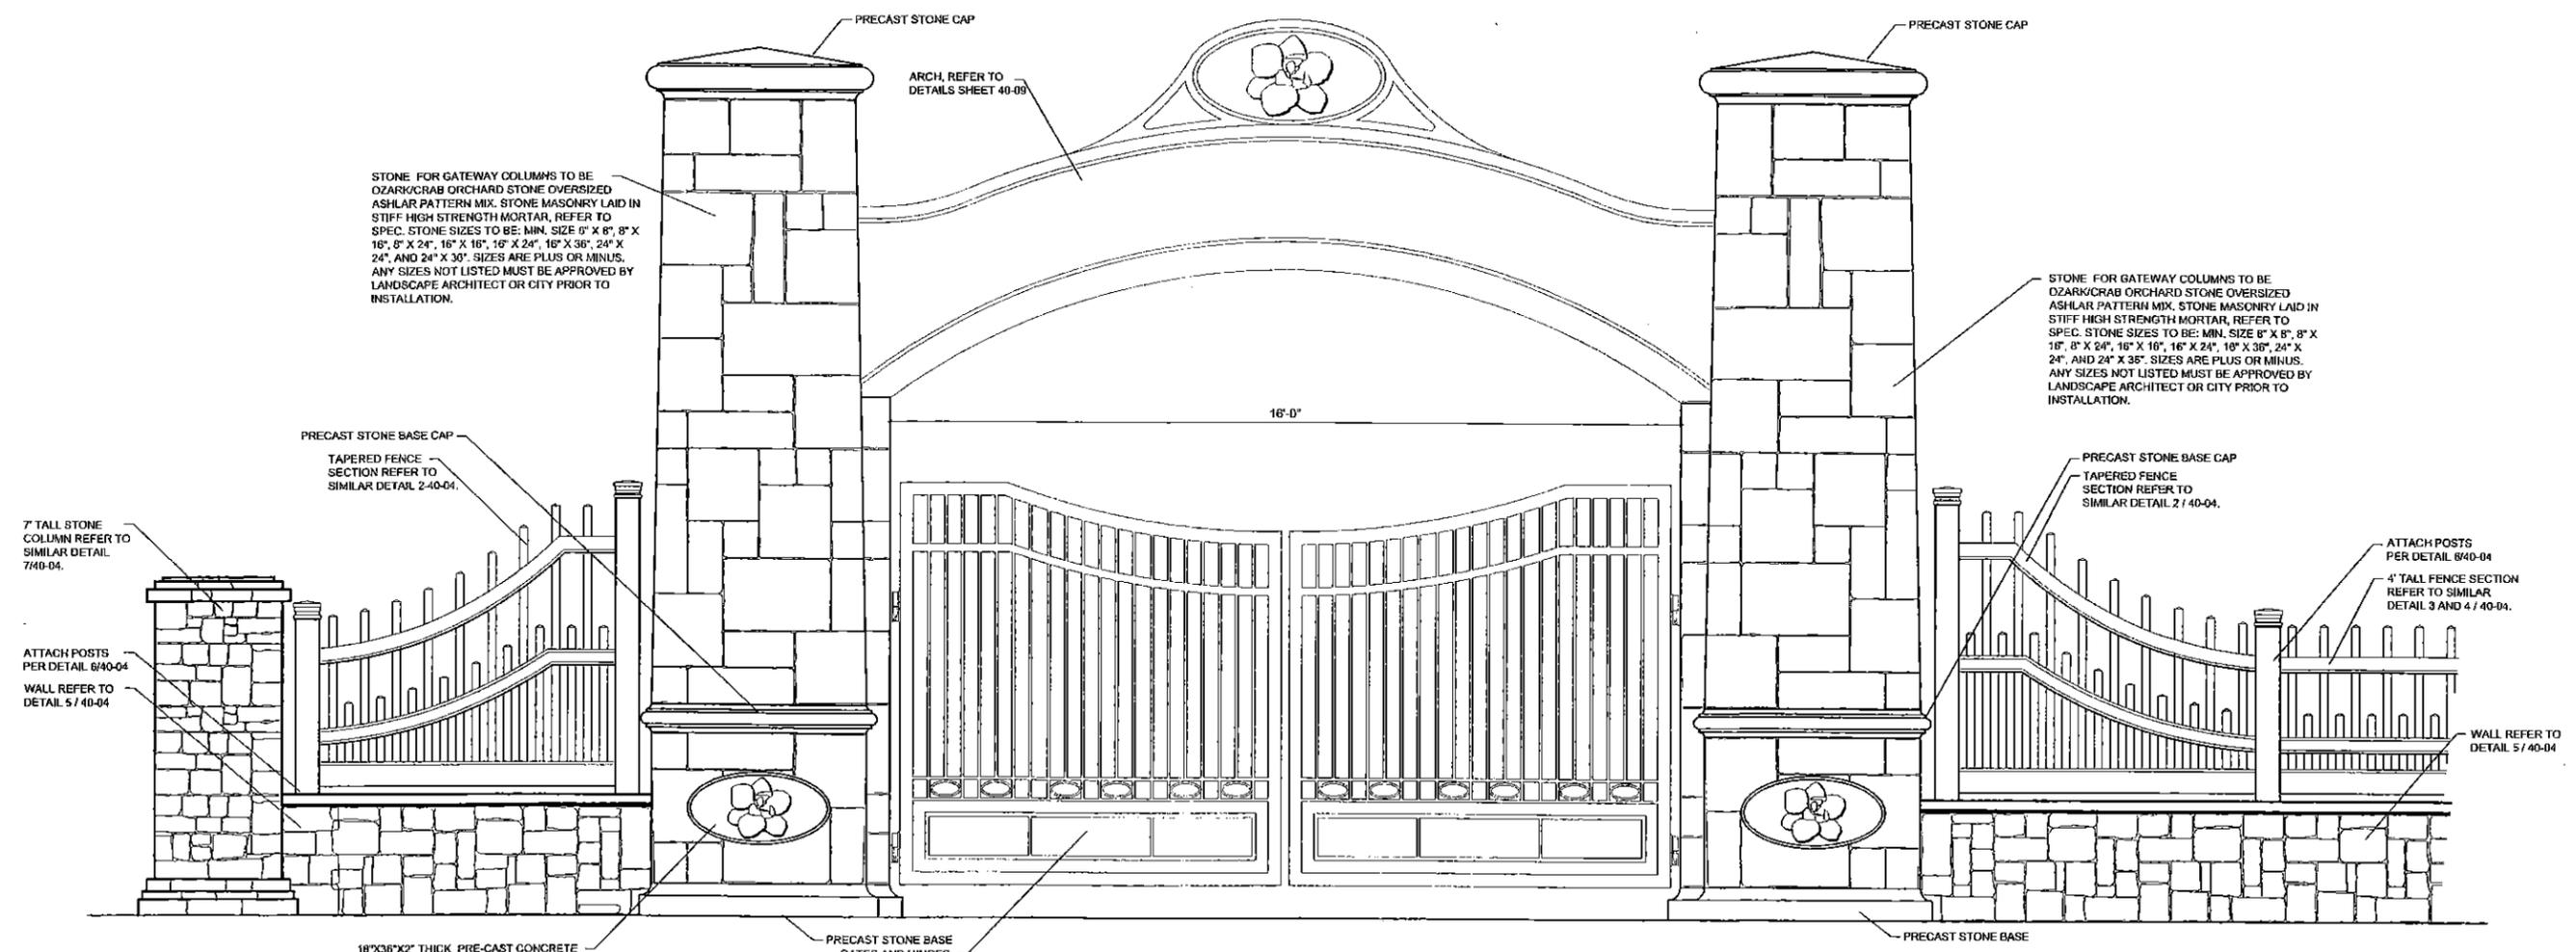

STONE FOR GATEWAY COLUMNS TO BE OZARK/CRAB ORCHARD STONE OVERSIZED ASHLAR PATTERN MIX. STONE MASONRY LAID IN STIFF HIGH STRENGTH MORTAR, REFER TO SPEC. STONE SIZES TO BE: MIN. SIZE 6" X 8", 8" X 16", 8" X 24", 16" X 16", 16" X 24", 16" X 36", 24" X 24", AND 24" X 36". SIZES ARE PLUS OR MINUS. ANY SIZES NOT LISTED MUST BE APPROVED BY LANDSCAPE ARCHITECT OR CITY PRIOR TO INSTALLATION.

STONE FOR GATEWAY COLUMNS TO BE OZARK/CRAB ORCHARD STONE OVERSIZED ASHLAR PATTERN MIX. STONE MASONRY LAID IN STIFF HIGH STRENGTH MORTAR, REFER TO SPEC. STONE SIZES TO BE: MIN. SIZE 6" X 8", 8" X 16", 8" X 24", 16" X 16", 16" X 24", 16" X 36", 24" X 24", AND 24" X 36". SIZES ARE PLUS OR MINUS. ANY SIZES NOT LISTED MUST BE APPROVED BY LANDSCAPE ARCHITECT OR CITY PRIOR TO INSTALLATION.

PRECAST STONE BASE CAP
TAPERED FENCE SECTION REFER TO SIMILAR DETAIL 2/40-04.

PRECAST STONE BASE CAP
TAPERED FENCE SECTION REFER TO SIMILAR DETAIL 2/40-04.

7' TALL STONE COLUMN REFER TO SIMILAR DETAIL 7/40-04.

ATTACH POSTS PER DETAIL 6/40-04
WALL REFER TO DETAIL 5/40-04

ATTACH POSTS PER DETAIL 6/40-04
4' TALL FENCE SECTION REFER TO SIMILAR DETAIL 3 AND 4/40-04.

WALL REFER TO DETAIL 5/40-04

18"X36"X2" THICK PRE-CAST CONCRETE - SOUTHERN MAGNOLIA BLOOM MEDALLION CONTRACTOR TO SUPPLY SAMPLE PRIOR TO FABRICATION AND INSTALLATION. INSTALL ON TWO SIDES OF EACH COLUMN.

PRECAST STONE BASE GATES AND HINGES NOT IN CONTRACT

PRECAST STONE BASE

ENTRANCE GATE ELEVATION